

VARIABLE AREA TYPE FLOW INDICATORS


C SERIES

Fluid Size	Range							
	Water (L/min.)				Air (NM ³ /H)			
15 (1/2")	1	0.8-8	3	1.2-12	5	1-10	7	1.5-15
	2	1-10	4	1.5-15	6	1.2-12	8	1.8-18
20 (3/4")	1	1.5-15	3	2.5-25	5	1.5-15	7	2-20
	2	2-20	4	3-30	6	1.8-18	8	2.5-25
25 (1")	1	3-30	3	5-50	5	3-30	7	6-60
	2	4-40	4	6-60	6	5-50	8	7-70
32 (1-1/4")	1	5-50	3	10-100	5	10-100	7	15-150
	2	8-80	4	12-120	6	12-120	8	20-200
40 (1-1/2")	1	10-100	3	20-200	5	15-150	7	20-200
	2	15-150	4	25-250	6	18-180	8	25-250
50 (2")	1	15-150	3	25-250	5	20-200	7	27-270
	2	20-200	4	30-300	6	25-250	8	30-300
65 (2-1/2")	1	30-300	3	50-500	5	28-280	7	36-360
	2	40-400	4	60-600	6	30-300	8	40-400
80 (3")	1	50-500	3	70-700	5	40-400	7	55-550
	2	60-600	4	80-800	6	50-500	8	60-600
100 (4")	1	70-700	3	90-900	5	60-600	7	80-800
	2	80-800	4	100-1000	6	70-700	8	90-900
125 (5")	1	100-1000	3	150-1500	5	80-800	7	100-1000
	2	120-1200	4	170-1700	6	90-900	8	120-1200
150 (6")	1	140-1400	3	180-1800	5	100-1000	7	130-1300
	2	160-1600	4	200-2000	6	120-1200	8	140-1400

Max. Temp.	100°C
Max. Pressure	10 kg/cm ²
Connection	JIS 10K RF Flange standard ANSI or DIN Flange available
Accuracy	Water ±2% F.S. ; Air ±3% F.S.

Body	Float	Seal
A SS304	4 SS304	N Neoprene
B SS316	6 SS316	V Viton
F Others	7 Others	T Others

HOW TO ORDER

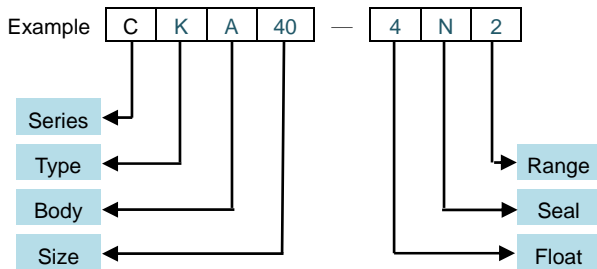


Options

- For other liquid or gas, please indicate the density.
- Other flow range available made-to-order
- Percentage scale available made-to-order

K Type

Flow direction: 90 degree, Bottom in → Side out

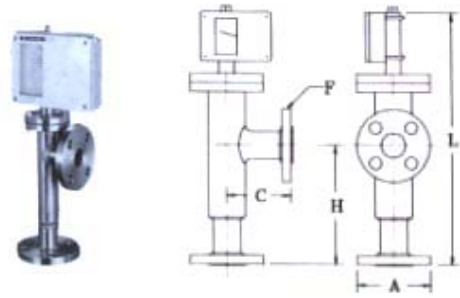


Unit: mm

Size	15	20	25	32	40	50	65	80	100	125	150
L	425	425	480	485	510	520	660	825	865	865	895
H	200	200	210	210	210	220	220	300	400	430	450
C	80	80	80	80	100	100	100	120	150	180	200
AØ	95	100	125	135	140	155	175	185	210	250	280
F	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"

H Type


Flow direction: 180 degree, Left → Right, Right → Left

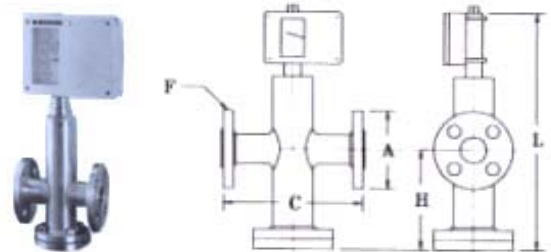

Size	15	20	25	32	40	50	65	80	100
L	420	420	450	460	460	470	480	595	750
H	80	80	95	100	105	110	120	125	140
C	140	140	160	160	200	240	300	360	400
AØ	95	100	125	135	140	155	175	185	210
F	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"

V Type

Flow direction : 180 degree, Bottom in → Top out

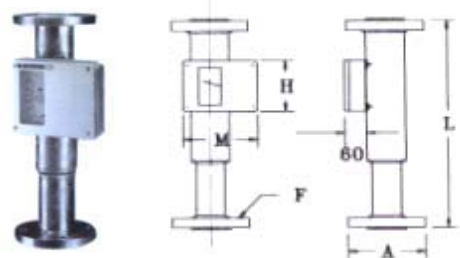

Unit: mm

Size	15	20	25	32	40	50	65	80	100	125	150
L	340	340	460	460	460	460	460	460	780	830	830
H	130	130	150	250	250	250	250	250	250	250	250
C	170	170	190	285	285	285	285	285	285	285	285
AØ	95	100	125	135	140	155	175	185	210	250	280
F	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"