


VARIABLE AREA TYPE FLOW INDICATORS

M SERIES

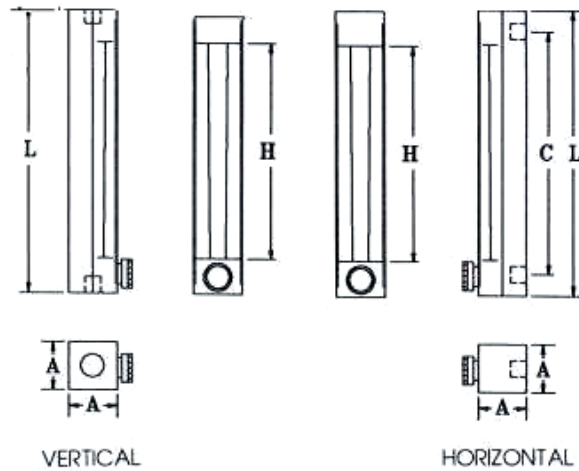

Body	SS304	SS316	PP
Max. Temp.	100°C		80°C
Max. Pressure	6 kg/cm ²		4 kg/cm ²
Connection	Female PT thread standard		
Accuracy	Water ±2% F.S. ; Air ±3% F.S.		
Accessory	Vertical Type — pedestal and couplers for hoses Horizontal — couplers for hoses		

Size	6	10	15	18	20	25
L	182	182	220	230	315	315
H	130	130	160	140	190	190
A	28	28	34	40	46	53
C	158	158	190	193	250	250
PT	1/4"	1/4"	1/2"	1/2"	3/4"	1"

Body	Tube	Float	Seal
A SS304	G Glass	1 Teflon	N Neoprene
B SS316	P PC	3 PP	V Viton
E PP	In → Out	4 SS304	S Silicon
F Others	V Vertical	5 Nylon	T Teflon
	H Horizontal	6 SS316	


Standard protect cover is Acrylic

Fluid Size	Range								
	Water (L/min.)				Air (NL/min.)				
6 (1/4"PT)	1	0.01-0.1		3	0.02-0.2		5	0.1-1.0	
	2	0.01-0.15		4	0.03-0.3		6	0.2-2.0	
10 (1/4"PT)	1	0.03-0.3		3	0.08-0.8		5	0.5-5.0	
	2	0.05-0.5		4	0.1-1.0		6	1-10	
15 (1/2"PT)	1	0.1-1.0		3	0.3-3.0		5	3-30	
	2	0.2-2.0		4	0.4-4.0		6	5-50	
18 (1/2"PT)	1	0.5-5.0		3	0.8-8.0		5	10-100	
	2	0.6-6.0		4	1-10		6	15-150	
20 (3/4"PT)	1	0.5-5.0		3	1.5-15		5	20-200	
	2	1-10		4	2-20		6	25-250	
25 (1"PT)	1	2-20		3	4-40		5	50-500	
	2	3-30		4	5-50		6	80-800	

Combination



several pieces combined abreast



combined with pedestal

Options

- For other liquid or gas, please indicate the density.
- Other flow range available made-to-order
- Percentage scale available made-to-order

HOW TO ORDER

