


VARIABLE AREA TYPE FLOW INDICATORS P SERIES

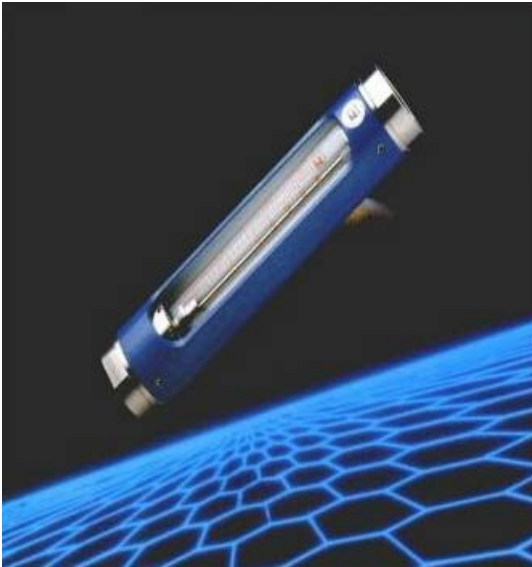

Unit: mm

Size	6	10	15	18	20	25	32
L	200	200	230	230	280	280	280
H	165	165	190	190	240	240	240
AØ	34	34	42	48	48	60	75
PT	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1-1/4"

Body	SS304	SS316	C.S.	PVC	PP
Max. Temp.	100°C			50°C	80°C
Max. Pressure	6 kg/cm ²			4 kg/cm ²	
Connection	Female PT thread standard				
Accuracy	Water ±2% F.S. ; Air ±3% F.S.				

Body	Tube	Float	Protect Cover
A SS304	G Glass	1 Teflon	A SS304
B SS316	P PC	2 PVC	B SS316
C C.S.	Seal	3 PP	C C.S.
D PVC.	N Neoprene	4 SS304	R Acrylic
E PP	V Viton	5 Nylon	
F Others	S Silicon	6 SS316	

Fluid Size	Range							
	Water (L/min.)				Air (NL/min.)			
6 (1/4"PT)	1	0.01-0.1	3	0.02-0.2	5	0.1-1.0	7	0.3-3.0
	2	0.01-0.15	4	0.03-0.3	6	0.2-2.0	8	0.5-5.0
10 (3/8"PT)	1	0.03-0.3	3	0.08-0.8	5	0.5-5.0	7	1-15
	2	0.05-0.5	4	0.1-1.0	6	1-10	8	2-20
15 (1/2"PT)	1	0.1-1.0	3	0.3-3.0	5	3-30	7	6-60
	2	0.2-2.0	4	0.4-4.0	6	5-50	8	10-100
18 (1/2"PT)	1	0.5-5.0	3	0.8-8.0	5	10-100	7	20-200
	2	0.6-6.0	4	1-10	6	15-150	8	25-250
20 (3/4"PT)	1	0.5-5.0	3	1.5-15	5	20-200	7	30-300
	2	1-10	4	2-20	6	25-250	8	40-400
25 (1"PT)	1	2-20	3	4-40	5	50-500	7	100-1000
	2	3-30	4	5-50	6	80-800	8	120-1200
32 (1-1/4"PT)	1	4-40	3	8-80	5	150-1500	7	250-2500
	2	5-50	4	10-100	6	200-2000	8	300-3000

Options

- For other liquid or gas, please indicate the density.
- Other flow range available made-to-order
- Percentage scale available made-to-order

HOW TO ORDER

