

# VARIABLE AREA TYPE FLOW INDICATORS

## PVA SERIES



PVA	6	10	15	18	20	25	32	40	50
Thread (PT)	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Water (L/min)	0.5	1	2	10	20	50	100	150	250
Air (NL/min)	5	20	50	200	300	1000	2000	2500	3000
Connection	Female PT thread								
Max. Temp.	80 °C								
Max. Pressure	6 kg/cm <sup>2</sup>								
Scale Ratio	Max / Min → 10 / 1								
Option	Combined with flanges (FPVA Series)								




Unit: mm

Size	6	10	15	18	20	25	32	40	50
L	200	200	230	230	280	280	280	280	280
H	160	160	170	170	220	220	220	220	220
AØ	30	30	40	40	50	60	70	90	100
PT	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

Body	Tube	Float	Central Stem
PP	G Glass	1 Teflon	A SS304
	P PC	2 PVC	B SS316
Cover	Seal	3 PP	
Acrylic	N Neoprene	4 SS304	
	V Viton	6 SS316	

### HOW TO ORDER

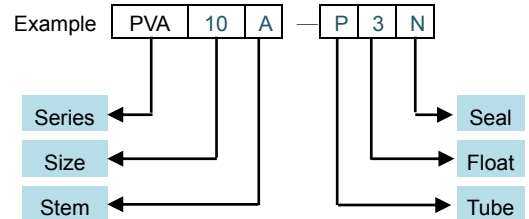


## MA-6A SERIES



gas	Air , N <sub>2</sub> , O <sub>2</sub> , He , H <sub>2</sub> , CO <sub>2</sub> ...etc. (for gas only)
Connection	1/8"PT female thread, back
Max. Temp.	60 °C
Max. Pressure	6 kg/cm <sup>2</sup>

Body	Float	Needle Valve
Acrylic	1 Teflon	
Seal	2 Nylon	A Brass
Neoprene	4 SS304	B SS304
	6 SS316	C SS316

Range		
1	0-250 CC/M	7 0.7-7.5 NL/M
2	0-500 CC/M	8 1-10 NL/M
3	0-900 CC/M	9 1.5-15 NL/M
4	0.15-1.5 NL/M	
5	0.3-3.5 NL/M	
6	0.5-5 NL/M	



### HOW TO ORDER

