


VARIABLE AREA TYPE FLOW INDICATORS J SERIES

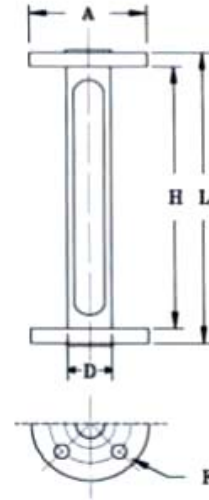

Body	SS304	SS316	C.S.	PVC	PP
Max. Temp.	100°C			50°C	80°C
Max. Pressure	6 kg/cm ²			4 kg/cm ²	
Connection	JIS 10K RF Flange standard ANSI or DIN Flange available made-to-order				
Accuracy	Water ±2% F.S. ; Air ±3% F.S.				


Unit: mm

Size	10	15	18	20	25	32	40	50
L	185	210	210	270	270	280	280	280
H	165	190	190	240	240	240	240	240
AØ	90	95	95	100	125	135	140	155
D	34	42	48	48	60	75	89	100
F	3/8"	1/2"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

Body	Tube	Float	Protect Cover
A SS304	G Glass	1 Teflon	A SS304
B SS316	P PC	2 PVC	B SS316
C C.S.	Seal	3 PP	C C.S.
D PVC.	N Neoprene	4 SS304	R Acrylic
E PP	V Viton	5 Nylon	
F Others	S Silicon	6 SS316	

Fluid Size	Range							
	Water (L/min.)				Air (NL/min.)			
10 (3/8")	1	0.03-0.3	3	0.08-0.8	5	0.5-5.0	7	1-15
	2	0.05-0.5	4	0.1-1.0	6	1-10	8	2-20
15 (1/2")	1	0.1-1.0	3	0.3-3.0	5	3-30	7	6-60
	2	0.2-2.0	4	0.4-4.0	6	5-50	8	10-100
18 (1/2")	1	0.5-5.0	3	0.8-8.0	5	10-100	7	20-200
	2	0.6-6.0	4	1-10	6	15-150	8	25-250
20 (3/4")	1	0.5-5.0	3	1.5-15	5	20-200	7	30-300
	2	1-10	4	2-20	6	25-250	8	40-400
25 (1")	1	2-20	3	4-40	5	50-500	7	100-1000
	2	3-30	4	5-50	6	80-800	8	120-1200
32 (1-1/4")	1	4-40	3	8-80	5	150-1500	7	250-2500
	2	5-50	4	10-100	6	200-2000	8	300-3000
40 (1-1/2")	1	10-100	3	20-200	5	250-2500	7	350-3500
	2	15-150	4	25-250	6	300-3000	8	400-4000
50 (2")	1	15-150	3	25-250	5	350-3500	7	450-4500
	2	20-200	4	30-300	6	400-4000	8	500-5000

HOW TO ORDER

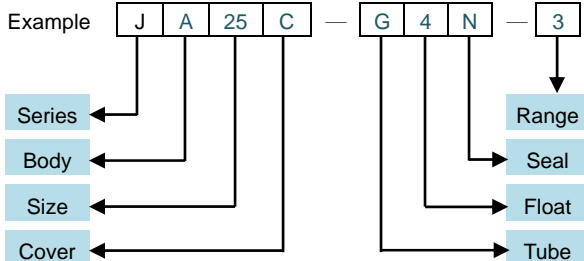

Options

- For other liquid or gas, please indicate the density.
- Other flow range available made-to-order
- Percentage scale available made-to-order